

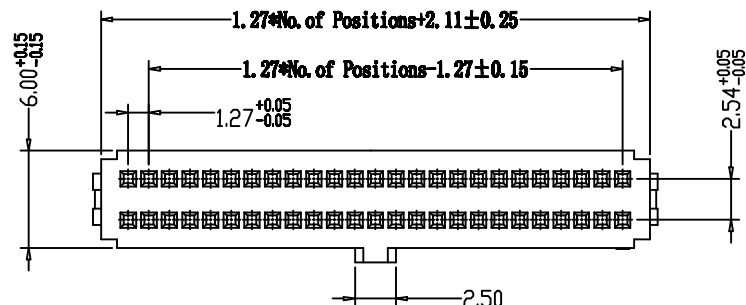

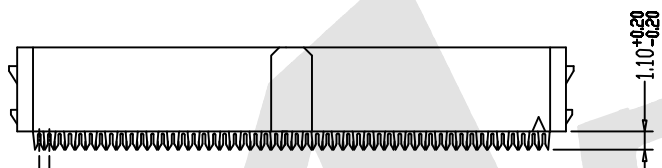

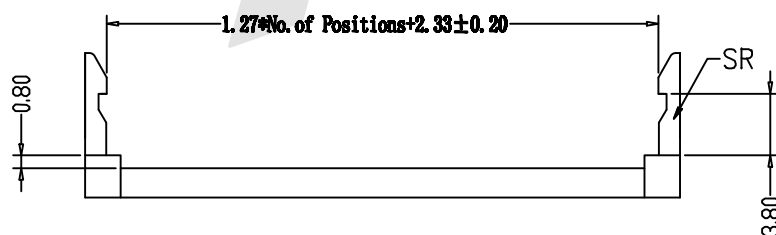


**TYPE 1
W/O BUMP**



**TYPE 2
WITH BUMP**

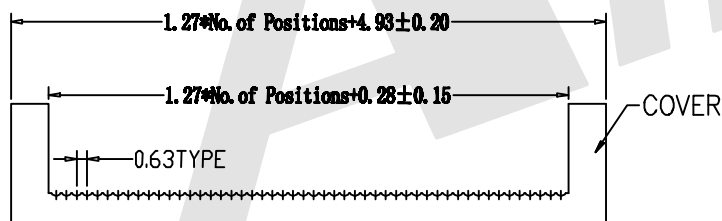

SPECIFICATION

Current Rating:	1.0Amp
Insulation Resistance:	1000MQ min
Contact Resistance:	20MQ max
Withstand Voltage:	500V AC/DC
Operating Temperature:	-40°C to +105°C
Contact Material:	Phosphor Bronze
Contact Plating:	Au Over Ni
Insulator Material:	PBT+30%GF UL 94V-0

Ordering Code:

FCBI01 - X - X - X - X - X - X

(1) (2) (3) (4) (5) (6) (7)

① **Series No:**

② No. of Contacts

10 14 16
20 24 26
30 34 40
50 60 70
80 100

③ Contact Plating

G0: Gold flash	S0: Gold flash/Ni
G1: 3u' Gold	S1: 3u' Gold/Ni
G2: 5u' Gold	S2: 5u' Gold/Ni
G3: 10u' Gold	S3: 10u' Gold/Ni
G4: 15u' Gold	S4: 15u' Gold/Ni
G5: 30u' Gold	S5: 30u' Gold/Ni
SN: Tin	

④ Color Insulator

B:Black
G:Grey

⑤ Packing

A:Tray
B:Bag
C:Tube
D:Tape

⑥ With Strain relief or not

A: With strain relief
B: without strain relief

⑦ **Bump Option:**

A: TYPE 1, W/O BUMP
B: TYPE 2, WITH BUMP

Unless Otherwise specified tolerance

SCALE: As Shown	UNIT: mm
DRAW Gong Feng	DATE 08/02/2017
CHECK BobYang	DATE 08/02/2017



AntenM

ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

1.27*2.54mm IDC Socket+SR With Bump

DRAWING NO: FCB01-XXXXXX

PRODUCT NO: FC801-XXXXXX

REV	DESCRIPTION	DATE