HSF Pb RoHS

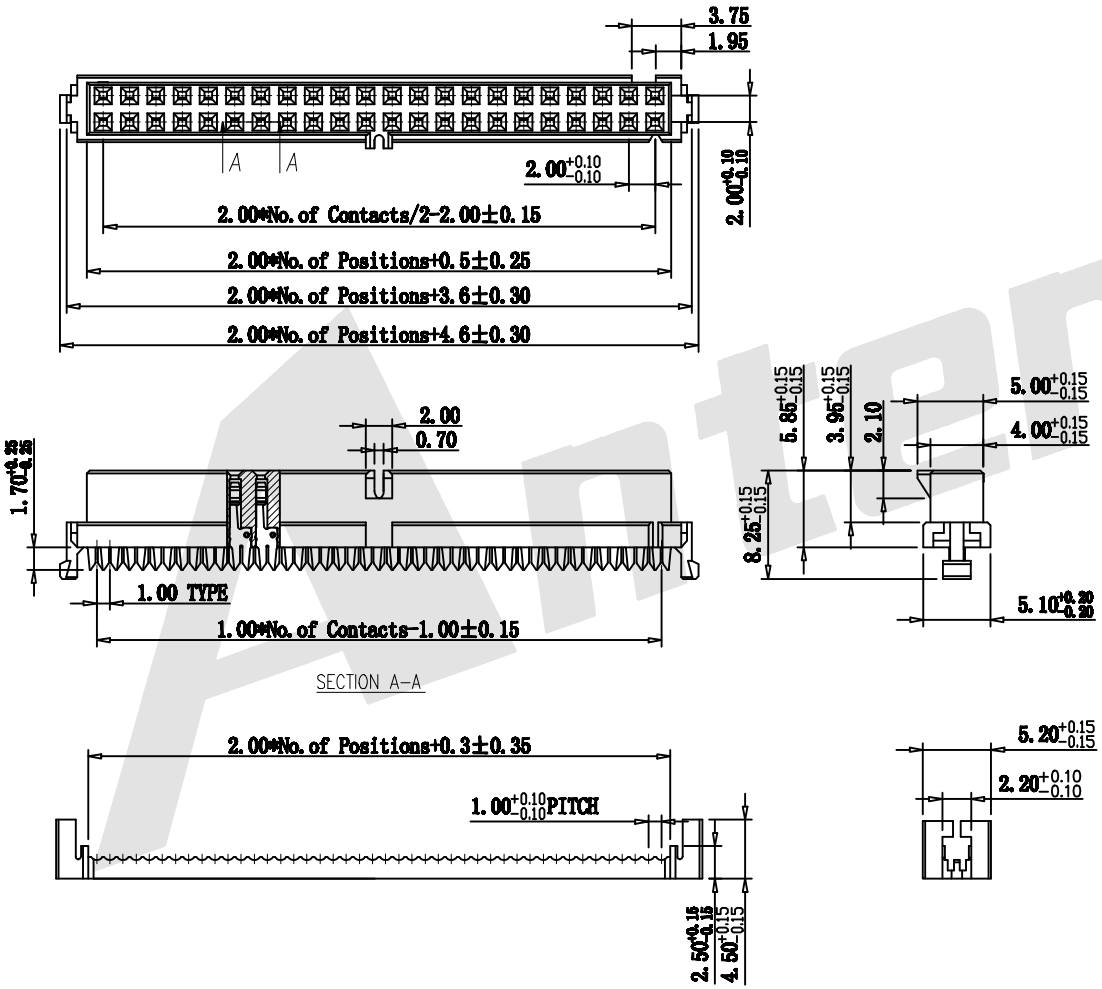

SPECIFICATION

Current Rating:	1.0Amp
Insulation Resistance:	1000MΩ min
Contact Resistance:	20MΩ max
Withstand Voltage:	500V AC/DC
Operating Temperature:	-40° C to +105° C
Contact Material:	Phosphor Bronze
Contact Plating:	Au Over Ni
Insulator Material:	PBT+30%GF UL 94V-0

Ordering Code:

FCCS04 - X - X - X - X - X

① ② ③ ④ ⑤ ⑥

① Series No:

② No. of Contacts
06P 08P 10P
12P 14P 16P
18P 20P 22P
24P 26P 30P
34P 36P 40P
44P 50P 60P
64P

③ Contact Plating
G0: Gold flash S0: Gold flash/Ni
G1: 3u" Gold S1: 3u" Gold/Ni
G2: 5u" Gold S2: 5u" Gold/Ni
G3: 10u" Gold S3: 10u" Gold/Ni
G4: 15u" Gold S4: 15u" Gold/Ni
G5: 30u" Gold S5: 30u" Gold/Ni
SN: Tin

④ Color Insulator
B:Black
G:Grey

⑤ Packing
A:Tray
B:Bag
C:Tube
D:Tape Reel

⑥ With Strain relief or not
A: With strain relief
B: without strain relief

REV	DESCRIPTION	DATE

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown	UNIT: mm
DRAW Gong Feng	DATE 08/03/2017
CHECK BobYang	DATE 08/03/2017

3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO,.LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 2.00mm IDC Socket With Bump T-Type

DRAWING NO: FCCS04-XXXX

PRODUCT NO: FCCS04-XXXX

Antenk