HSF Pb RoHS

SPECIFICATION

Current Rating:	3.0 Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PBT,UL 94V-0 Black

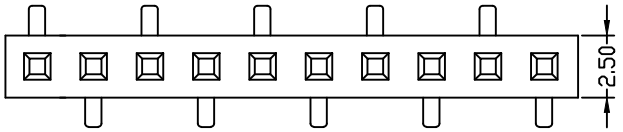

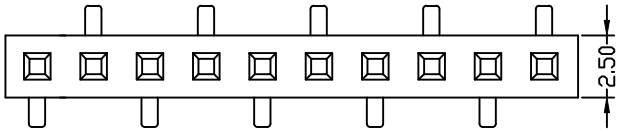



TYPE C
PCB LAYOUT

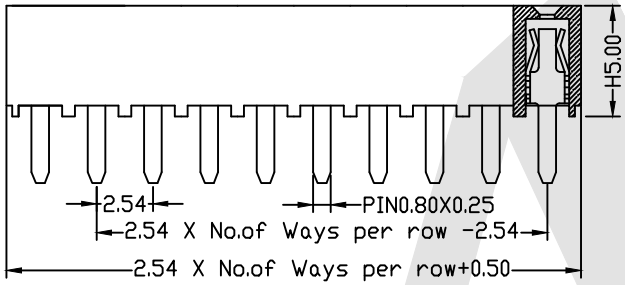



TYPE A (B)



TYPE C

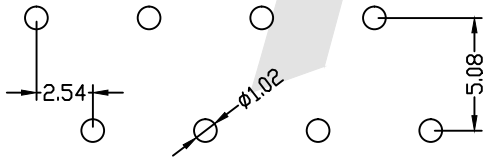

TYPEA

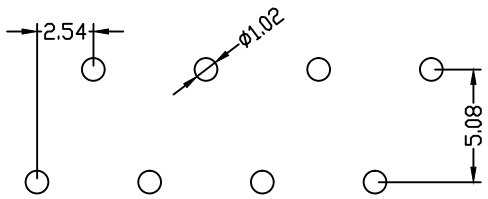

TYPE B

PCB LAYOUT

Ordering Code:

FHEU01 - X - X - S - X - X - X - X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No:

② No.of Contacts
01 To 40

③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u "Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin

④ Connector Type
S:Single

⑤ Plastic High:
H:5.0
Please mark the
desired length in the H

⑥ Insulator Material
A:PBT
B:PA6T
C:LCP
D:PA46
E:PA9T

⑦ Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

⑧ Special Function
A:Type A
B:Type B
C:Type C

REV	DESCRIPTION	DATE

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown	UNIT: mm
DRAW YG ZHONG	DATE 01/05/2016
CHECK BobYang	DATE 01/05/2016

3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO,.LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
2.54mm Female Header Single Row Centipede foot Type

DRAWING NO: FHEU01-XXSXXXX

PRODUCT NO: FHEU01-XXSXXXX

Antenk