

HSF



SPECIFICATION

Current Rating: 3.0 Amp
Insulation Resistance: 1000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65°C to +125°C
Contact Material: Brass
Insulator Material: PBT, UL 94V-0 Black

Ordering Code:

FHER09 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{T}{3}$ - $\frac{X}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$ - $\frac{X}{7}$

① Series No:

② No. of Contacts
06 To 120

③ Contact Plating:

G0: Gold flash S0: Selective
G1: 3u" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin




④ Connector Type
T: Three⑤ Plastic High:
H: 8.5

Please mark the desired length in the H

⑥ Insulator Material

A: PBT
B: PA6T
C: LCP
D: PA46
E: PA9T
⑦ Packing
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP

PCB LAYOUT

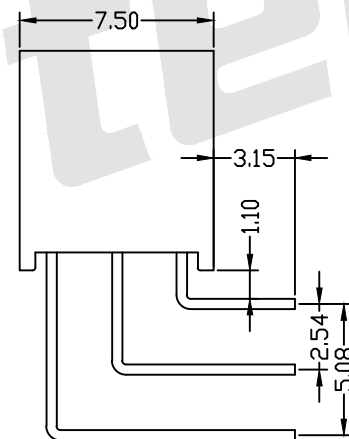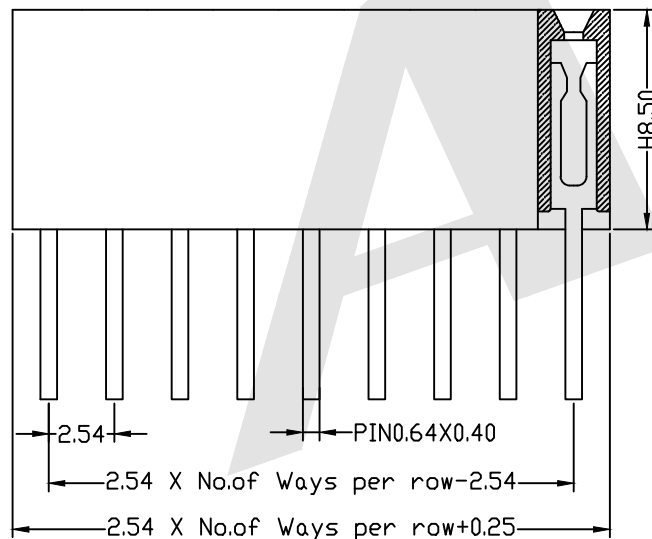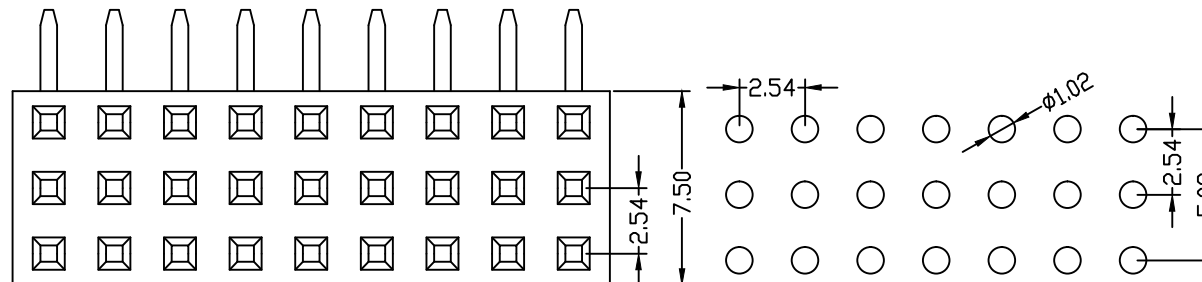

Unless Otherwise specified tolerance
X. ± 0.35 X. XX: ± 0.20
X. X: ± 0.25 X. XXX: ± 0.15

SCALE:
As ShownUNIT:
mmDRAW
YG ZHONGDATE
01/05/2016CHECK
BobYangDATE
01/05/2016

ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:

2.54mm Female Header Three Row Angle Type H:8.5

DRAWING NO:

FHER09-XXTXXX

PRODUCT NO:

FHER09-XXTXXX



3rd ANGLE PROJECTION

REV

DESCRIPTION

DATE