
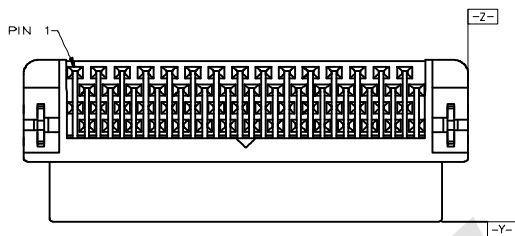
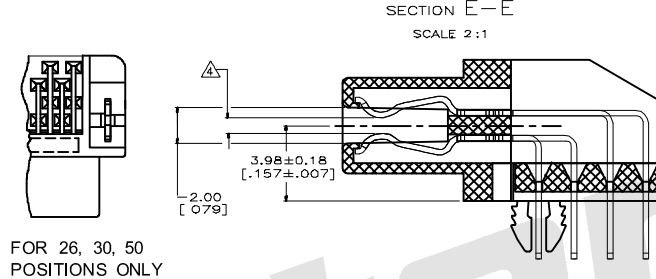
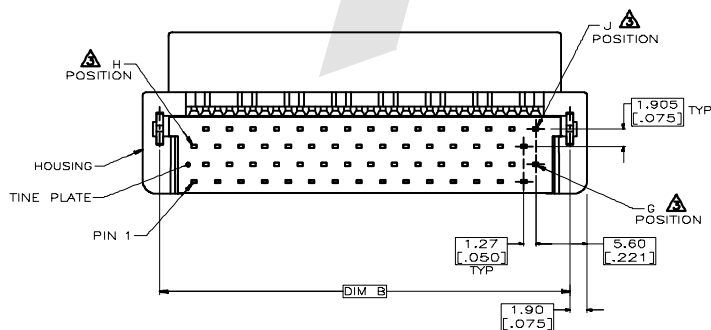
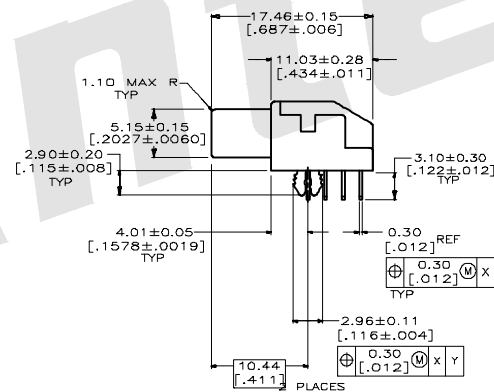
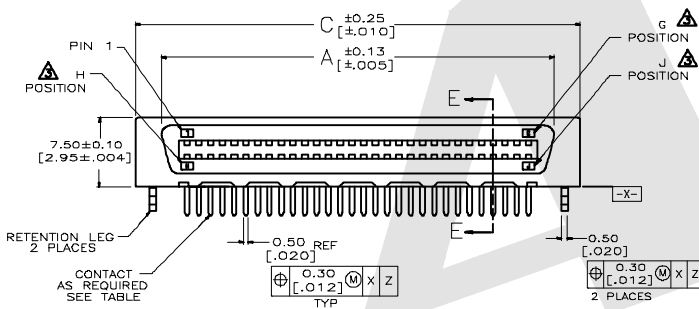


HSF



ROHS

FOR 20, 40, 60, 68, 80, 100, 120
POSITIONS ONLYFOR 26, 30, 50
POSITIONS ONLYBOTTOM VIEW
A TYPEBOTTOM VIEW
B TYPE

SPECIFICATIONS:

1. Electrical Characteristics:

- 1.1 Contact Current Rate: 1AMP
- 1.2 Insulation Resistance: 500MΩ Minimum
- 1.3 Contact Resistance: 35MΩ Maximum
- 1.4 Dielectric Voltage: 500V AC For One Minute

2. Material:

- 2.1 Insulator: LCP+30%G/F, Color: black
- 2.2 Contact: Phosphor bronze

4. Environment:

Operation Temperature: -40° C To +105° C

No. of Pin	Dimensions						
	A	B	C	D	G	J	H
20	16.97	18.83	22.63	13.13	10	20	11
26	20.78	22.64	26.44	16.94	13	26	14
30	23.32	25.18	28.98	19.48	15	30	16
40	29.67	31.53	35.33	25.83	20	40	21
50	36.02	37.88	41.68	32.18	25	50	26
60	42.37	44.23	48.03	---	30	60	31
68	47.45	49.31	53.11	43.61	34	68	35
80	55.07	56.93	60.73	51.23	40	80	41
100	67.77	69.63	73.43	63.93	50	100	51
120	80.47	82.33	88.13	76.83	60	120	61

Ordering Code:

HPZTR - F - X - X - X
① ② ③ ④ ⑤

- ① Series No:
1.27mm Right-Angle
Full Plastic Type

- ② Contact Type:
F: Female


- ③ Contact No.:
20=20P 26=26P 30=30P
40=40P 50=50P 60=60P 68=68P
80=80P 100=100P 120=120P

- ④ Contact Plating
S0: Gold Flash Selective Plating
S1: 3u" Gold selective plating
S2: 5u" Gold Selective Plating
S4: 15u" Gold Selective Plating
S5: 30u" Gold Selective Plating

- ⑤ PCB LAYOUT OPTION
A: A TYPE B: B TYPE

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
DRAW Jack Bao DATE 9/18/2018
CHECK Bob Yang DATE 9/18/2018



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:
1.27mm Series Receptacle Right-Angle Full
Plastic Type

DRAWING NO: HPZTR-FXXX

PRODUCT NO: HPZTR-FXXX

REVISE FOOTPRINT

2021. 10. 29

REV DESCRIPTION

DATE