





HSF

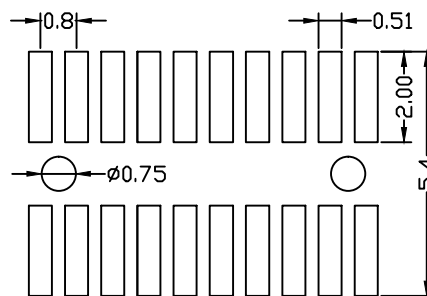

RoHS

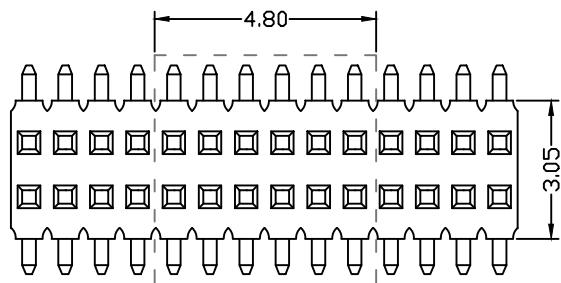

P. C. B. LAYOUT

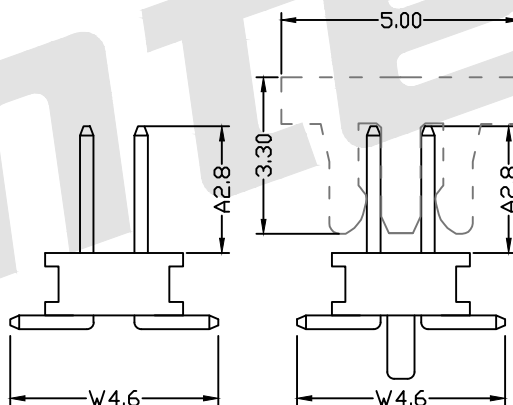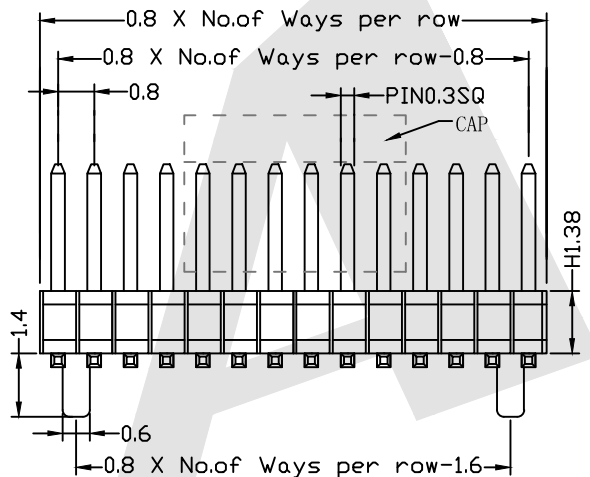

TYPE A

TYPE B

SPECIFICATIONS:

Current Rating:	0.75Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65° C to +125° C
Contact Material:	Brass
Insulator Material:	PA6T, UL94V-0 Black

Ordering Code:


PHAM01	-	X	-	X	-	D	-	A-W	-	X	-	X	-	X
①		②		③		④		⑤		⑥		⑦		⑧

- ① Series No:
- ② No. of Contacts:
02 To 100
- ③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
- ④ Connector Type:
D: Dual
- ⑤ PinLength:
A:0280=2.80mm
W:0460=4.60mm
Please mark the desired length in the A/W
- ⑥ Insulator Material:
B:PA6T E:PA9T
C:LCP
- ⑦ Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
- ⑧ With locating pegs option
A:Type A
B:Type B

Standard IE P/N :

PHAM01-10-G0-D-0280-0460-B-B-B

A	W	Unless Otherwise specified tolerance		 ANTENK ELECTRONICS CO.,LTD Http://www.antenk.com E-mail:sales@antenk.com
2.8	4.6	X. ± 0.35	X.XX: ± 0.20 X.X: ± 0.25 X.XXX: ± 0.15	
Optional		SCALE: As Shown	UNIT: mm	
		DRAW YG ZHONG	DATE 11/25/2015	TITLE: 0.8mm Pin Header Dual Row SMT Type
		CHECK BobYang	DATE 11/25/2015	
	2016/10/25	 3rd ANGLE PROJECTION		DRAWING NO: PHAM01-XXD-0280-0460-XXX
	DATE			PRODUCT NO: PHAM01-XXD-0280-0460-XXX



3rd ANGLE PROJECTION