

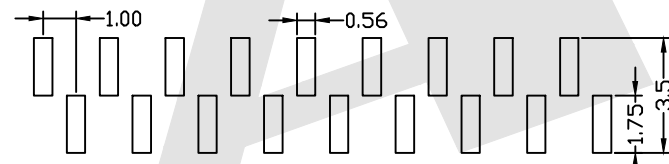
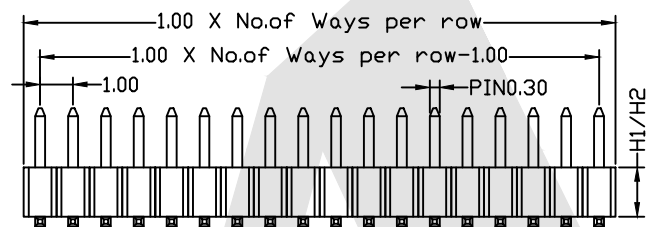
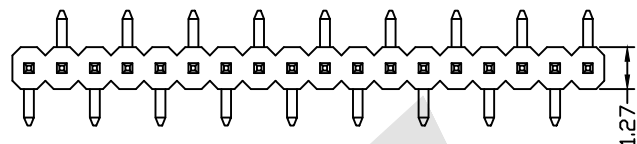


HSF

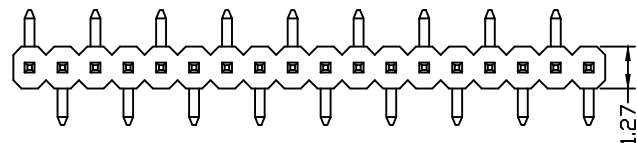


TYPE A

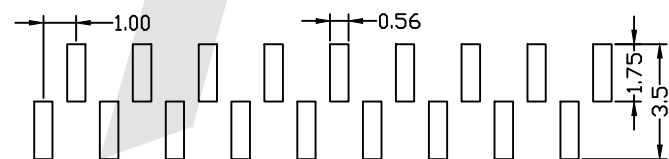

TYPE B

P. C. B LAYOUT



SPECIFICATIONS:

Current Rating:	0.75Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65° C to +125° C
Contact Material:	Brass
Insulator Material:	PA6T, UL94V-0, Color:Black

Ordering Code:

PHBM01 - X - X - S - A - W - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No:
② No. of Contacts:
01 To 50
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
④ Connector Type:
S:Single
⑤ Pin Length:
A:0180=1.80mm
W:0350=3.50mm
Please mark the desired length
in the A/W
⑥ Insulator Material:
B:PA6T
C:LCP
E:PA9T
⑦ Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
⑧ Plastic High:
H1: 1.0mm
H2: 1.5mm
⑨ PCB Layout Option
A:Type A
B:Type B

Standard IE P/N :

PHBM01-10-G0-S-0180-0350-B-B-H1-B

A	W	Unless Otherwise specified tolerance		ANTENK ELECTRONICS CO., LTD Http://www.antenk.com E-mail:sales@antenk.com
1.8	3.5	X. ±0.35	X.XX: ±0.20	
Optional		X.X: ±0.25	X.XXX: ±0.15	
SCALE:		As Shown	UNIT:	TITLE: 1.00mm Pin Header Single Row SMT Type
DRAW		YG ZHONG	DATE	
CHECK		BobYang	DATE	
2016/10/25				DRAWING NO: PHBM01-XXS-0180-0350-XXXX
DATE				PRODUCT NO: PHBM01-XXS-0180-0350-XXXX

Increase packing method and material

REV

DESCRIPTION

DATE