

HSF




SPECIFICATION

Current Rating: 3 Amp
Insulation Resistance: 1000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65°C to +125°C
Contact Material: Brass
Insulator Material: PA6T,UL 94V-0Black



Ordering Code:

PHEM07 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{D}{3}$ - $\frac{A-B}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$ - $\frac{X}{7}$ - $\frac{X}{8}$

- ① Series No:
② No. of Contacts
02 To 80
③ Contact Plating:
G0: Gold flash S0: Selective
G1: 3u" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin
④ Connector Type
D: Dual
⑤ Pin Length:
A: 0600=6.00mm
B: 0368=3.68mm
Please mark the desired length in the A/B
- ⑥ Insulator Material
A: PBT
B: PA6T
C: LCP
D: PA46
E: PA9T
⑦ Packing
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
⑧ Plastic High
H1: 1.70mm
H2: 2.54mm
H3: 2.00mm

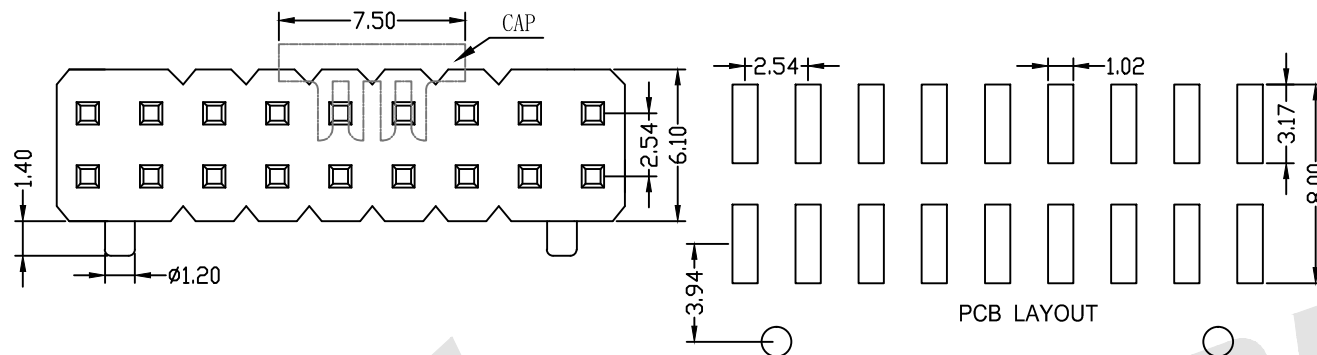

PCB LAYOUT

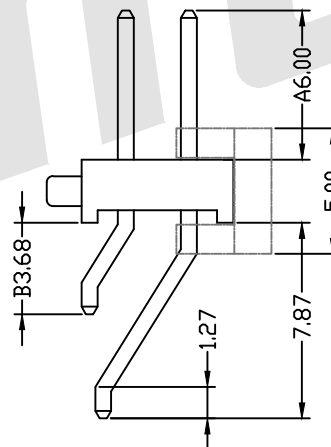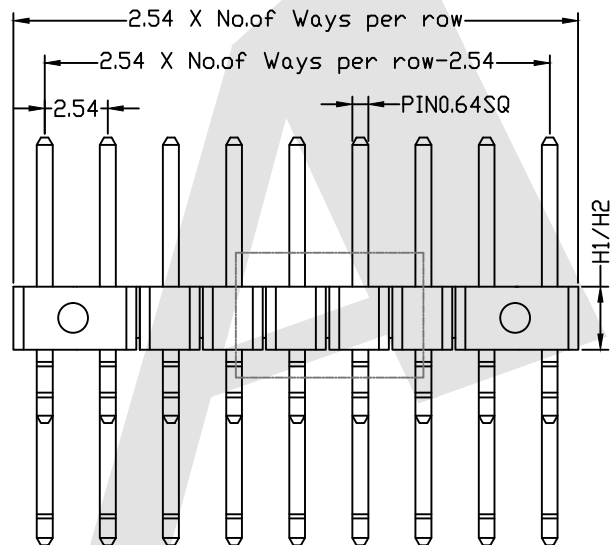


Standard IE P/N :

PHEM07-10-G0-D-0600-0368-B-B-H1

A	B	Unless Otherwise specified tolerance	
		X. ±0.35	X. XX: ±0.20
		X. X: ±0.25	X. XXX: ±0.15
6.0	3.68	SCALE:	UNIT:
Optional		As Shown	mm

DRAW
YG ZHONG
DATE
01/05/2016

CHECK
BobYang
DATE
01/05/2016



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
2.54mm Pin Header DualRow
Angle SMT Type With Post

DRAWING NO: PHEM07-XXD-0600-0368-XXX

PRODUCT NO: PHEM07-XXD-0600-0368-XXX

Increase packing method and material

2016/10/25

DATE

REV

DESCRIPTION