

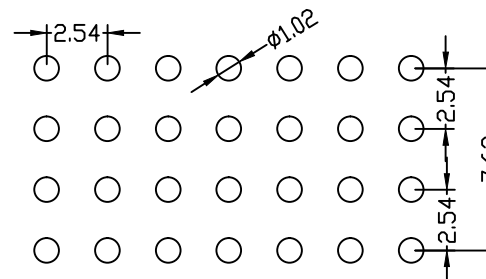
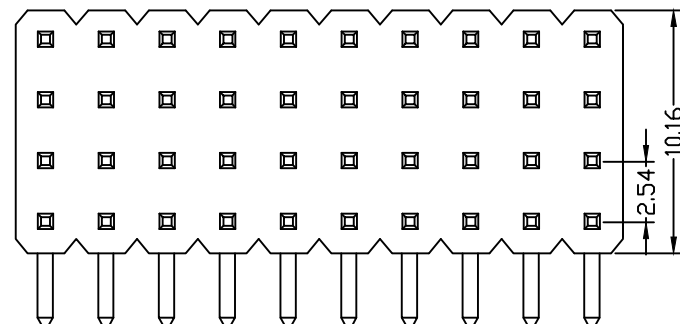


HSF

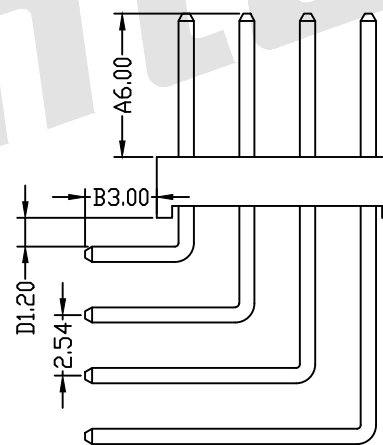

PCB LAYOUT

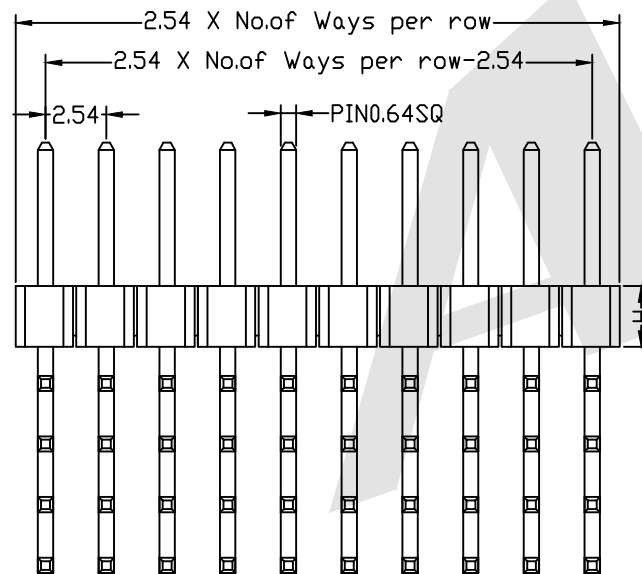

SPECIFICATION

Current Rating:	3.0 Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PBT,UL 94V-0 Black

Ordering Code:

PHER11 - X - X - F - A-B-D - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
② No. of Contacts
04 To 160
③ Contact Plating:
G0: Gold flash S0: Selective
G1: 3u" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin
④ Connector Type
F: Four
⑤ Pin Length:
A: 0600=6.00mm
B: 0300=3.00mm
D: 0120=1.20mm
Please mark the desired length in the A/B/D
- ⑥ Insulator Material
A: PBT
B: PA6T
C: LCP
D: PA46
E: PA9T
⑦ Packing:
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
⑧ Plastic High
H1: 1.70mm
H2: 2.54mm
H3: 2.00mm
H4: 1.50mm

Standard IE P/N :

PHER11-10-G0-F-0600-0300-0120-A-B-H2

A	B	D	Unless Otherwise specified tolerance	
6.0	3.0	1.2	X. ±0.35 X.X: ±0.25	X.XX: ±0.20 X.XXX: ±0.15

Optional

SCALE:
As ShownDRAW
Mo Guo XuanCHECK
BobYang

3rd ANGLE PROJECTION

UNIT:
mmDATE
11/12/2018DATE
11/12/2018

ANTENK ELECTRONICS CO., LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE:
2.54mm Pin Header Four Row Angle Type

DRAWING NO: PHER11-XXF-0600-0300-0120-XXX

PRODUCT NO: PHER11-XXF-0600-0300-0120-XXX

REV

DESCRIPTION

DATE